





					B10	B16	C10	C16	DALI	t _c
onework LUX 1200 TW DALI	○				n=18	n=28	n=29	n=47	BOKE BK-DWL040E-A1050ADP	< 90°
onework LUX 1200 TW DALI	●				n=18	n=28	n=29	n=47	BOKE BK-DWL040E-A1050ADP	< 90°

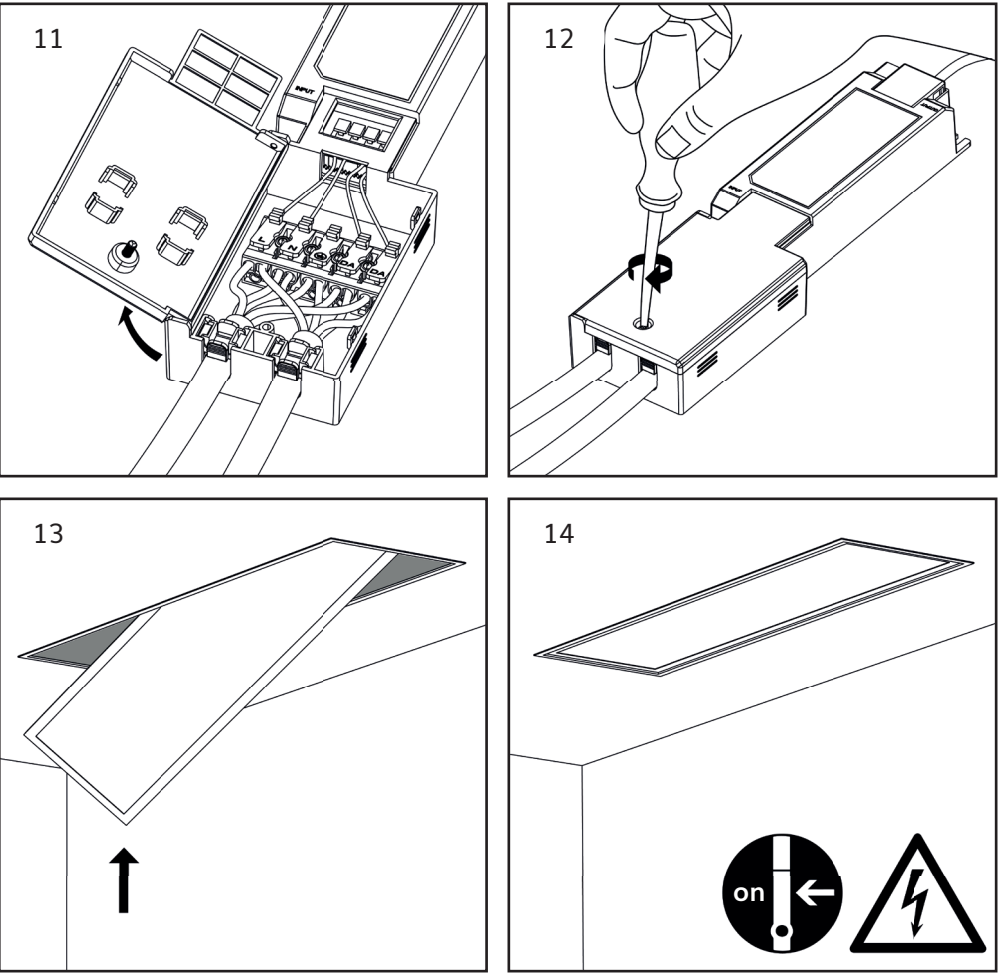

// oneworkLUX 1200 TW DALI

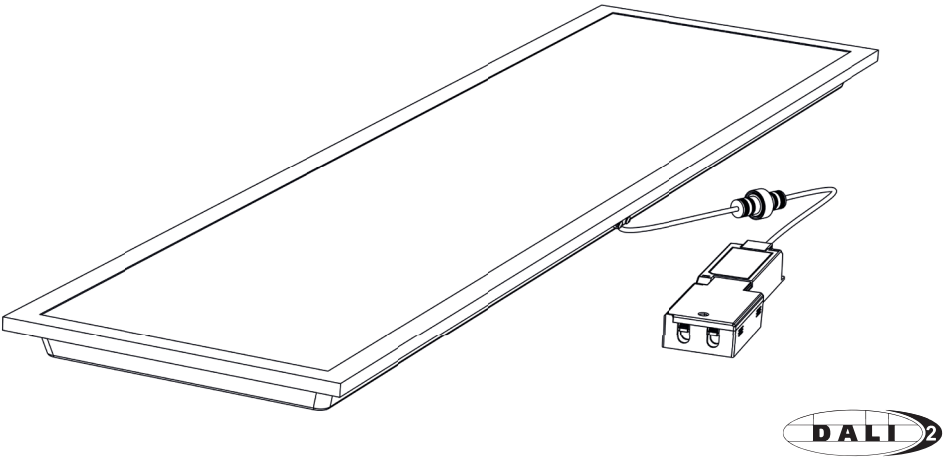

	GTIN	LxWxH [mm]	W	V _{AC}	Hz	lm	lm/W
onework LUX 1200 TW DALI	○ 4262520990223	1195x295x35	32	220–240	50–60	4200	>130
onework LUX 1200 TW DALI	● 4262520990186	1195x295x35	32	220–240	50–60	4200	>130

	K	IP	IK	α	R _o	°C	PF	kg
onework LUX 1200 TW DALI	○ 2700–6500	20	03	95°	85	-20...+40	> 0,95	2,22
onework LUX 1200 TW DALI	● 2700–6500	20	03	95°	85	-20...+40	> 0,95	2,22

